

INDUCTIVE SENSOR - Ø 6.5

Special mini version
PUR cable connection

TYPE - ART. NO.

SM-10-6.5-S-L-CP5M - SM106019

SM-10-6.5-O-L-CP5M - SM105080

SM-20-6.5-S-L-CP5M

DESCRIPTION

10 = PNP

20 = NPN

6.5 = Ø 6.5 - shielded


S = normally open

O = normally closed

L = led

CP5M = 5m PUR cable

DIMENSIONS AND TECHNICAL DATA

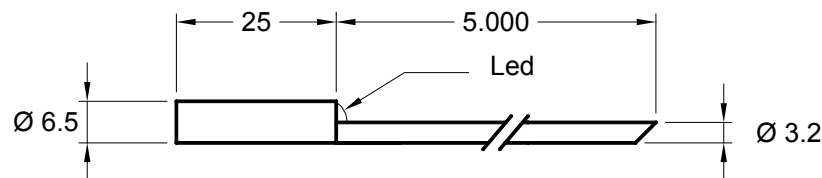

Operating distance S_n	2 mm
Flush mounting	yes
Electrical version	3 wires DC
Operating voltage U_b	10...35 Vdc
Output current I_e	max. 150mA
Voltage drop U_d	max. ≤ 3.5 V
Permitted residual ripple	max. 5%
No load current I_o	tip. 10mA
Frequency of operating cycles	max. 2 KHz
Hysteresis	< 10 %
Repeat accuracy	< 1 %
Permitted ambient temperature	-20...+70°C
Temperature drift	< 10 %
Led display	yellow
Protective circuit	built-in
Degree of protection	(IEC 529) IP 67
Housing material	INOX 303
Active surface material	PVDF
Connection	cable 5m, PUR, 3x0.14mm ²
Maximum torque	-

