

AC INDUCTIVE PROXIMITY SENSOR SQUARE TYPE



Q40s
●
15 mm
PBT RESIN
●



CE

20-250VAC
<2.5mA
400mA
2.5mA
5A(20ms)
5mA
<8VAC AT 400MA
<25HZ
10ms/10ms
<15%(Sr)
<1.0%(Sr)
IP67
-25 °C - +70 °C
<10%(Sr)
-
PBT

P7S1P4015AOMS3	52
P7S1P4015ACMS3	52

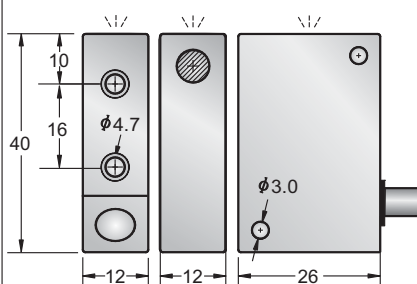

Approx.170 g

AC INDUCTIVE PROXIMITY SENSOR 5 WAY ROTATABLE SENSING HEAD

Q40


20 mm
PBT RESIN




CE

20-250VAC
<2.5mA
400mA
2.5mA
5A(20ms)
5mA
<8VAC AT 400MA
<25HZ
10ms/10ms
<15%(Sr)
<1.0%(Sr)
IP67
-25 °C - +70 °C
<10%(Sr)
-
PBT

P7S2P4020AO2B	9
P7S2P4020AC2B	10
P7S2P4020AA4B	21

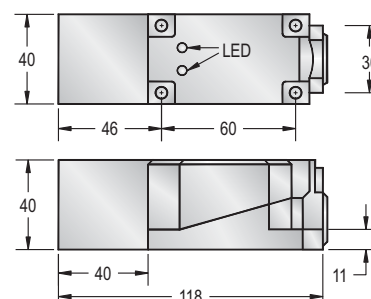

Approx.262 g

AC INDUCTIVE PROXIMITY SENSOR 5 WAY ROTATABLE SENSING HEAD


Q40
○
15 mm
PBT RESIN
●



CE

20-250VAC
<2.5mA
400mA
2.5mA
5A(20ms)
5mA
<8VAC AT 400MA
<25HZ
10ms/10ms
<15%(Sr)
<1.0%(Sr)
IP67
-25 °C - +70 °C
<10%(Sr)
PBT

P7S1P4015AOZB2	56
P7S1P4015ACZB2	56
P7S1P4015AAZB4	42

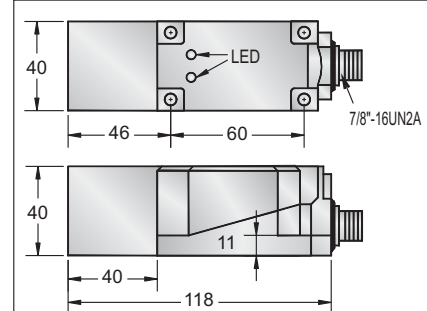

Approx.295 g

