


ANALOG INDUCTIVE VOLTAGE AND CURRENT OUTPUT ANALOG SENSORS


M12
●
0.1-3.0mm
Nickel plated brass
○



18-30VDC
<10%
<35mA
0-10VDC/≥2KΩ
4-20mA/400Ω Max.
<5%
0.02mm
0°C ~ +70°C
<5%(Sr)
-
YES
IP67
PNP-ANALOG
100Hz
-
RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2
PBT

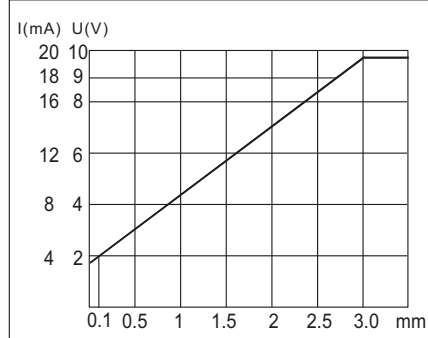

P5C1B1203GM4A2	18	P5C1B1203GMEA4	41
----------------	----	----------------	----

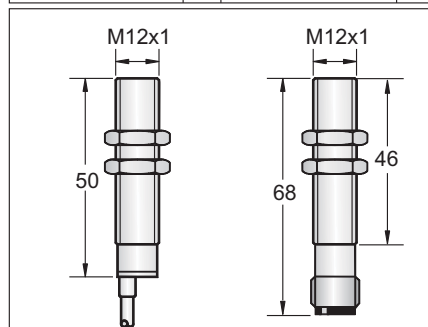


4φ3x0.15	—
approx.67g	approx.30g


M12
○
0.1-4 mm
Nickel plated brass
○



18-30VDC
<10%
<35mA
0-10VDC/≥2KΩ
4-20mA/400Ω Max.
<5%
0.02mm
0°C ~ +70°C
<5%(Sr)
-
YES
IP67
PNP-ANALOG
100Hz
-
RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2
PBT

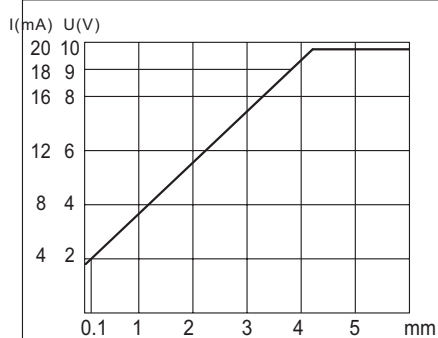

P5C2B1204GM4A2	18	P5C2B1204GMEA4	41
----------------	----	----------------	----

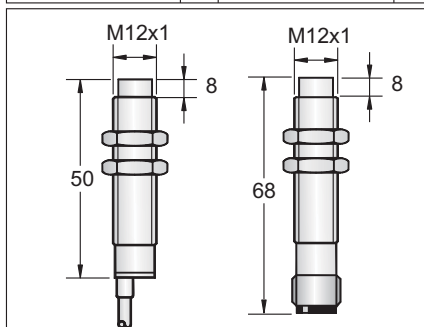


4φ3x0.15	—
approx.67g	approx.30g


M18
●
1-4 mm
Nickel plated brass
○



18-30VDC
<10%
15mA
0-10VDC/≥4.7KΩ
0-20mA/0-200Ω Max.
<10%(Sr)
0.02mm
0 ° C-70 °C
<5%(Sr)
NO
YES
IP67
PNP-ANALOG
100Hz
-
RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2
PBT

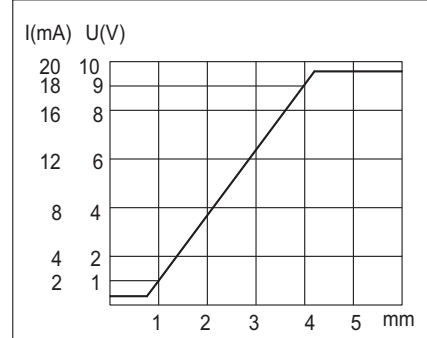

P5C1B1804GM4A2	18	P5C1B1804GMEA4	41
----------------	----	----------------	----

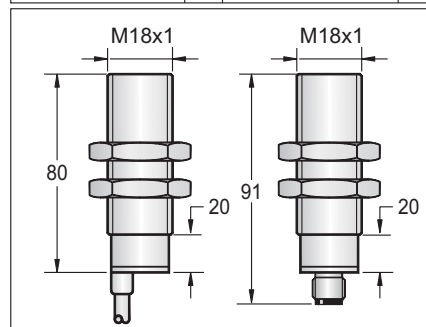

5.8φ4x0.15	—
approx.142g	approx.60g