



ANALOG INDUCTIVE VOLTAGE OUTPUT ANALOG SENSORS


M8
●
0.1-1.5 mm
Nickel plated brass
○

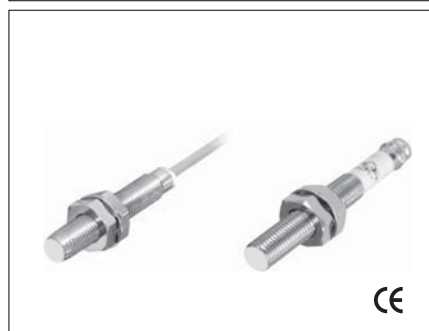

18-30VDC
<10%
<35mA
0-10VDC / $\geq 2K\Omega$
-
<5%(Sr)
0.02mm
-25°C ~ +70°C
5%(Sr)
-
YES
IP67
PNP-ANALOG
100Hz
-
RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2, Part 7.4.1 / IEC 60947-5-2, Part 7.4.2
PBT

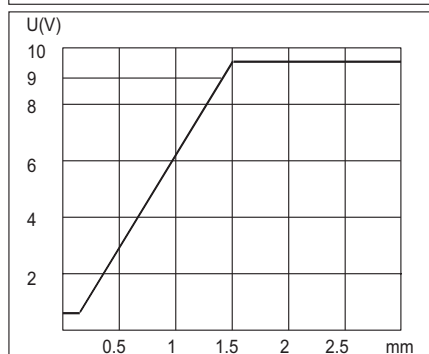

P5C1B081.5GV3A2	20	P5C1B081.5GVPA3

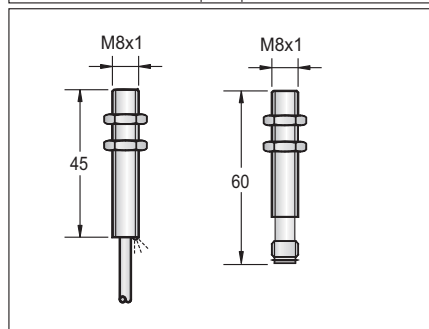


3 ϕ 3x0.15	—
approx.40g	approx.15g


M8
○
0.1-2.5mm
Nickel plated brass
○



18-30VDC
<10%
<35mA
0-10VDC / $\geq 2K\Omega$
-
<5%(Sr)
0.02mm
-25°C ~ +70°C
5%(Sr)
-
YES
IP67
PNP-ANALOG
100Hz
-
RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2, Part 7.4.1 / IEC 60947-5-2, Part 7.4.2
PBT

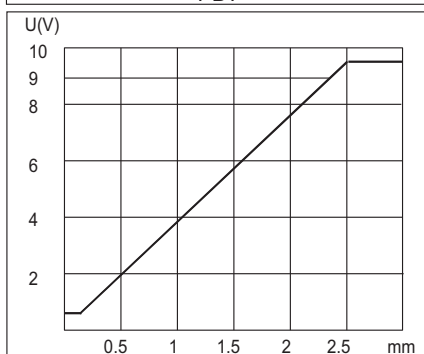

P5C2B082.5GV3A2	20	P5C2B082.5GVPA3

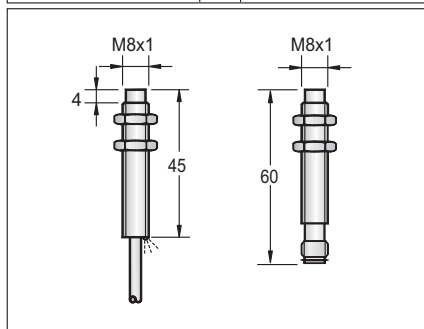


3 ϕ 3x0.15	—
approx.40g	approx.15g


M12
●
0.1-3.0mm
Nickel plated brass
○



18-30VDC
<10%
<35mA
0-10VDC / $\geq 2K\Omega$
-
<5%(Sr)
0.02mm
-25°C ~ +70°C
5%(Sr)
-
YES
IP67
PNP-ANALOG
100Hz
-
RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2, Part 7.4.1 / IEC 60947-5-2, Part 7.4.2
PBT

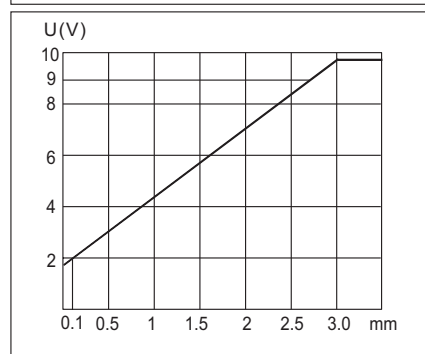

P5C1B1203GV3A2	20	P5C1B1203GVEA4	39

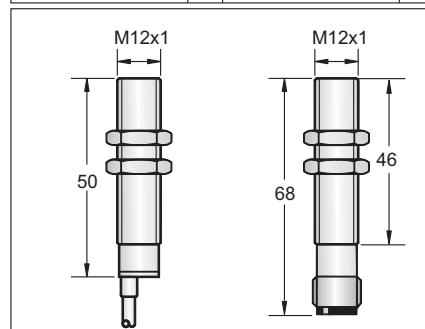

4 ϕ 3x0.15	—
approx.67g	approx.30g