


DC INDUCTIVE PROXIMITY SENSOR 5 WAY ROTATABLE SENSING HEAD

Q25x40x12	
	
2 mm	4 mm
PBT RESIN	
	



10-30VDC / 10-55VDC / 10-60VDC	
<10%	
<10mA	
200mA	
<0.01mA	
<1.5V	
300HZ	100HZ
0.5ms/0.5ms	1ms/1ms
<15% (Sr)	
<1.0% (Sr)	
IP67	
-25 °C - +70 °C	
<10% (Sr)	
YES	
220mA	
PBT	

P1S1P4002N03A2	1	P1S2P4004N03A2
P1S1P4002NC3A2	2	P1S2P4004NC3A2
P1S1P4002P03A2	3	P1S2P4004P03A2
P1S1P4002PC3A2	4	P1S2P4004PC3A2
P1S1P4002PS4A2	6	P1S2P4004PS4A2
P1S1P4002NS4A2	5	P1S2P4004NS4A2
P4S1P4002C02A2	7	P4S2P4004C02A2
P4S1P4002CC2A2	8	P4S2P4004CC2A2
P3S1P4002N03A2	1	P3S2P4004N03A2
P3S1P4002NC3A2	2	P3S2P4004NC3A2
P3S1P4002P03A2	3	P3S2P4004P03A2
P3S1P4002PC3A2	4	P3S2P4004PC3A2

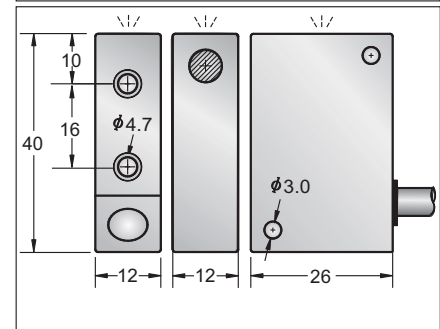


4.0 ϕ 3x0.15, 4x0.15, 2x0.34
Approx. 133 g

Q40s
●
15 mm
PBT RESIN
●



10-30VDC / 10-55VDC / 10-60VDC
<10%
<10mA
200mA
<0.01mA
<1.5V
100HZ
1ms/1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25 °C - +75 °C
<10%(Sr)
YES
220mA
PBT

P1S1P4015NOES4	31
P1S1P4015NCES4	32
P1S1P4015POES4	33
P1S1P4015PCES4	34
P1S1P4015PSES4	36
P1S1P4015NSES4	35
P4S1P4015COES4	37
P4S1P4015CCES4	38
P3S1P4015NOES4	31
P3S1P4015NCES4	32
P3S1P4015POES4	33
P3S1P4015PCES4	34

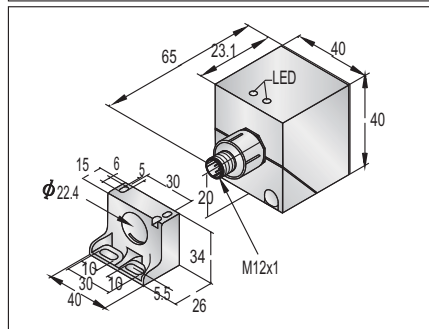


Approx. 170 g

Q40s
○
30 mm
PBT RESIN
●



10-30VDC / 10-55VDC / 10-60VDC
<10%
<10mA
200mA
<0.01mA
<1.5V
100HZ
1ms/1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25 °C - +75 °C
<10%(Sr)
YES
220mA
PBT

P1S2P4030NOES4	31
P1S2P4030NCES4	32
P1S2P4030POES4	33
P1S2P4030PCES4	34
P1S2P4030PSES4	36
P1S2P4030NSES4	35
P4S2P4030COES4	37
P4S2P4030CCES4	38
P3S2P4030NOES4	31
P3S2P4030NCES4	32
P3S2P4030POES4	33
P3S2P4030PCES4	34

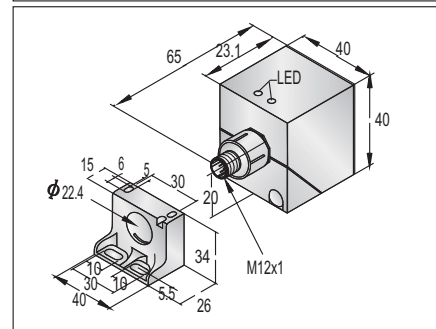

Approx.170 g
