



## LASER POINTER LSE10 SERIE - RED LIGHT - ø10.5 - 1mW



Laser pointer made of a high quality red laser diode, available with 635 nm wavelength and a power of 1 mW.  
Suitable for uses at max 1 m distance.

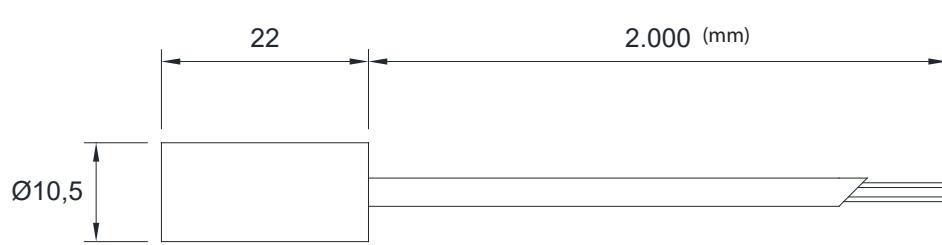

Cable connection

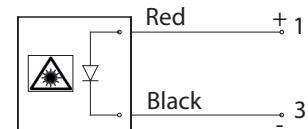

The brightness varies depending on the ambient light and on the colour of the object on which the laser beam is projected.

Accessories page 52

Type	LSE10-635-1-T10-P-AAN					
Art. no.	SM319007					
Mounted lens	point					
Point diameter at 1 m distance	~ 1,0 mm					
Power supply	5,0 Vdc					
Power	< 1 mW					
Wavelength	635 ± 5 nm					
Beam divergence	0,5 mrad					
Life time at + 20°C	≥ 10.000 h					
Permitted temperature	-10°...+50°C					
Current consumption	< 40 mA					
Focus adjustment	yes					
Housing material	black anodized aluminum					
Cable connection	2m, 2 wires					
Safety protection class		LASER 2				
Degree of protection	IP40					
READ THE INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING						
Laser according to the standard EN 60825-1: 2015-12						